

AFO-4

AirFlow Optimizer Fan Package

Features:

- Variable frequency drive (VFD)
- Pressure transducer
- Tubeaxial booster fan & motor

Benefits:

- Maintains optimal airflow minimizing dry time
- Corrects dryer inefficiencies / conserves energy
- Fully automated (after setup)

Utility Requirements:


- 208v or 480v (specify); 60 Hz; 3-phase
- Independent electrical source required

Fan Specifications:

- Drive: Belt
- Motor: 1-1/2hp; 1,730 rpm
- Max BHP: 1.20
- Fan RPM: 1,843
- Sones @ 0.250-in. SP @ 5' - 45
- Motor enclosure: enclosed / fan cooled
- Motor height: 10-inch
- Shaft diameter: 1-inch
- Blades: 6; aluminum
- FLA: 4.5-4.1/2.0
- Max inlet temp: 200 deg F
- Max ambient temp: 104 deg F
- Bearing: ball
- Mounting: vertical/horizontal
- Housing: steel; baked enamel finish

CFM


- @ 0.000-in. SP - 6,564
- @ 0.125-in. SP - 6,357
- @ 0.250-in. SP - 6,146
- @ 0.500-in. SP - 5,678
- @ 0.750-in. SP - 5,092
- @ 1.000-in. SP - 4,187

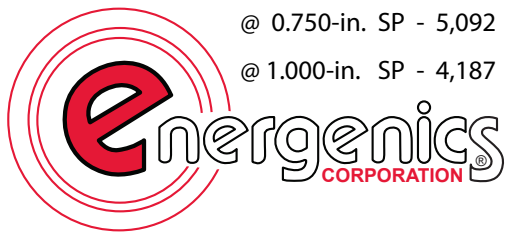

AFO - SERIES



Variable Frequency Drive, Fan, & Transducer

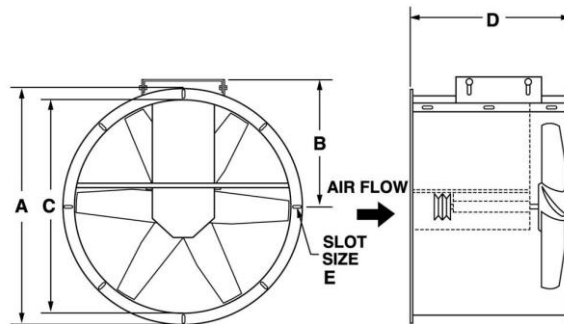

Dimensions

- A: 23-7/8"
- B: 16-3/4"
- C: 21-1/2"
- D: 18"
- E: 7/16"

INLINE SPACE SAVER TYPICAL INSTALLATION WITH AIRFLOW OPTIMIZER OR BOOSTER FAN

