



1470 Don Street
Naples, FL 34104
Ph. 239-643-1711
Fax 239-643-6081

Thank you for your interest in an **Energenics Cart Disinfection Chamber!** To ensure you receive the best cart disinfection system for your needs, Energenics asks that you complete the following questionnaire. These will be kept confidential. Thank you for your participation.

Company _____ Contact _____ Title _____

Location _____ Phone _____ Email _____

Cart Disinfection Operations:

Please provide a brief description of the functionality and flow of your current cart disinfection process. A video or photos of the process is helpful (if available).

On average, how many carts do you disinfect per hour? _____

How are carts fed through your system? Manually Conveyor Hand Wash Carts

Please mark the type(s) of linen or materials moved in the carts.

Healthcare Food & Beverage Hospitality Other _____

Do you currently or plan to bag/line the carts in and/or out of your facility? Yes _____ No _____

Do you have carts contaminated with solids? Yes _____ No _____

Do you intend to "pre-wash" contaminated carts prior to entry in the cart chamber? Yes _____ No _____

Note: Visible soil should be removed prior to entering cart disinfection chamber.

Contaminated solids on a cart will not be removed by most disinfection systems alone.

What type of cart(s) do you put through your system (type, size, construction material)?

Are all carts in good operating condition with functioning wheels? Yes _____ No _____

*Please provide pictures of the carts if possible.

Cart Disinfection Area:

Please list the dimensions of the space available for the Chamber. _____

*Please provide pictures of the intended area.

Do you require cart auto-ejection? Yes _____ No _____

Note: Ramps will be required with this option. Please account for added footprint (60" each side).

Note: Floor MUST be level as not to inhibit door functions. Clearance of doors on floor-level chamber is <1/4".

Required Utilities:

Electrical

120/60/1 20 FLA per system panel

Water

Soil-side "pre-wash" station recommended for visibly soiled carts.

Air

1/2" NPT, 1 CFM @ 80 PSI filtered and dried

(Doors: 40 psi; Cart ejection: 80 psi)

Ducting:


Ducting the Energenics Cart Disinfection Chamber to the outside is not required.

Scheduling

Time-frame for delivery?

ASAP 1-6 months 6-12 months 12+ months

Typical Configuration:

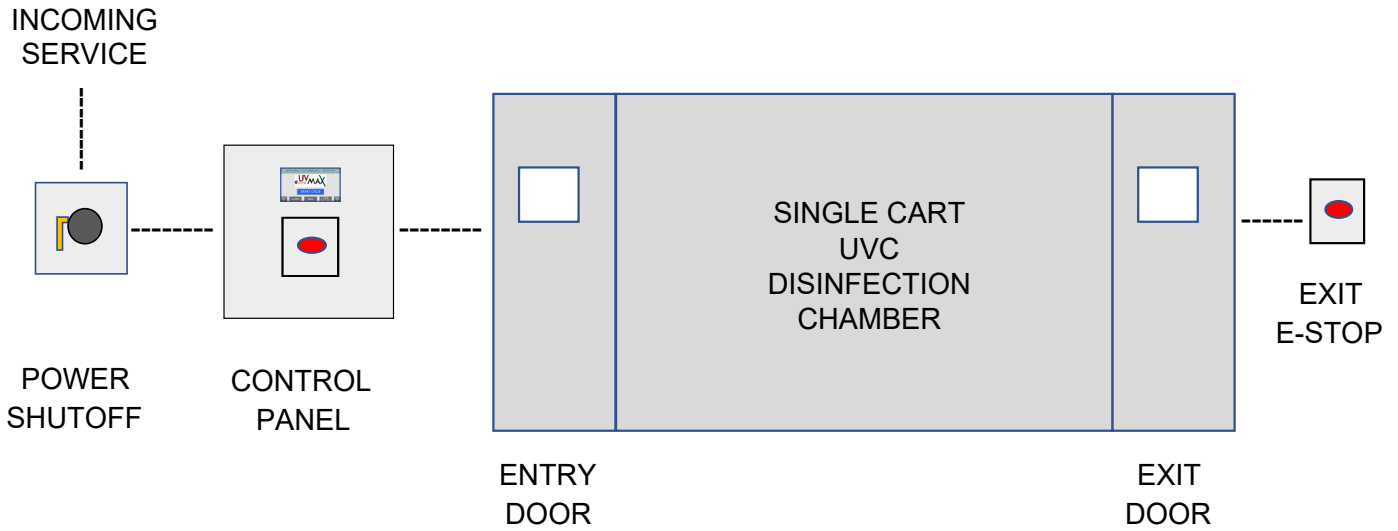

Note: "K2" (two-cart) disinfection chamber requires an added satellite panel that is roof mounted.

Thank you for providing this information. It will be used to ensure you are presented the proper equipment for the job. Please submit completed form to fred@energenics.com.

Energenics Corp.